

# LEAF outdoor use with swing doors



**A proven design combined with a neat design.**

The VANERUM LEAF external display cases with swing door are weatherproof by offering perfect waterproofing without condensation in compliance with the criteria of standards NF EN 1027 and XP P20-650-1. They are certified to NF Education, NF Collectivité and NF Environnement. Unique and sturdy, the frame features rounded corners with a cap decorated with an elegant leaf-shaped cut-out pattern that is available in 5 colours to match the colours of your logo or decoration.

## Details

**SAFE FOR USERS:** NF Education, NF Collectivité et NF Environnement certifications.

**GUARANTEED WEATHER RESISTANCE:** According to the AEV (Air\*Water\*Wind) classification, which is normally a window standard, the LEAF outdoor display case has a waterproof level E\*5A and a resistance to wind pressure and deformation of level V\*C2. Air permeable (anti-condensation), it protects documents from humidity and ensures that they can be read without obstruction.

**ANTI-UV GLASS FAÇADE (optional):** To provide additional protection for documents against the sun (99.5% of UV are blocked).

**CUSTOMIZABLE:** To match your shop window to your logo or decoration, the corners are delivered in 5 different sets of colours (grey RAL7042, red RAL3020, blue RAL5015, yellow RAL1018 and green RAL6018).

**EASY ACCESS:** The hinged door makes it easy to access content for updating. The door can be installed on the right or left. Magnetic surface for displaying with magnets.

**INACCESSIBLE WALL MOUNTING:** After locking the door.

**SIDE-BY-SIDE MOUNTING:** Equipped with front locks, the display cases can be placed side by side in order to have maximum display capacity.

**IDENTICAL OR DIFFERENT LOCKS:** On request and within the limit of 10.

**OPTIONAL STAND:** To install your display case where you need it. To be bolted on.

**SECURITY GLASS OR POLYACRYLATE DOOR:** More transparent and difficult to scratch, 4 mm safety glass offers greater resistance to impacts and thermal shocks and the advantage, in the event of breakage, of breaking into small pieces to prevent accidents. Polyacrylate is lightweight and highly resistant to impact.

## Materials

Surface in pre-lacquered magnetic steel sheet. Usable internal depth: 20 mm.

Swing door made from tempered safety glass (4 mm) or polyacrylate (3 mm).

Locking by a front lock, delivered with 2 keys.

Frame made from natural anodised aluminium. Heavy-duty corners and caps made of methacrylate.

Two vertical multicellular foam seals and a deflector ensure perfect watertightness. Natural vertical ventilation by top and bottom labyrinth to avoid condensation.

Optional stand to be bolted on.

Other colors for lacquering frame profiles on request.

## Certifications & warranty


Standard warranty: 2 years

The product is certified to NF Education, NF Collectivité and NF Environnement.

The product is manufactured in a French factory which is certified to ISO 9001, OHSAS 18001 and ISO 14001.


M0 fire rating of display cases with steel surface and glass doors.



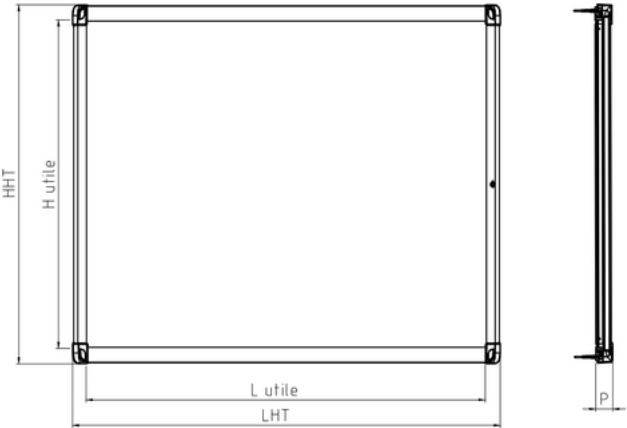

Finishings

Laquage des profils (quelques possibilités) / Lacquering of the profiles (few possibilities)

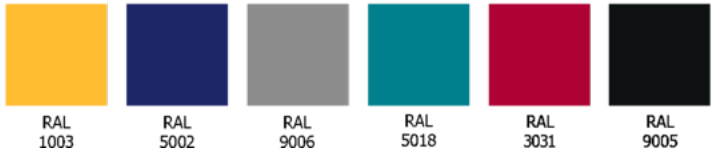

Dimensions & weight

Model	Material / Color	OAH mm	OAW mm	OAD mm	Useful H mm	Useful W mm	Net weight (kg)
4 A4	glass/steel	677	506	45	594	418	7
6 A4	glass/steel	677	716	45	594	628	9
8 A4	glass/steel	677	926	45	594	838	12
9 A4	glass/steel	974	716	45	891	628	12.5
10 A4	glass/steel	677	1136	45	594	1048	14
12 A4	glass/steel	974	926	45	891	838	16.5
15 A4	glass/steel	974	1136	45	891	1048	19
4A4	plexiglas/steel	677	506	45	594	418	4.5
6A4	plexiglas/steel	677	716	45	594	628	6.5
8A4	plexiglas/steel	677	926	45	594	838	8
9A4	plexiglas/steel	974	716	45	891	628	9
10A4	plexiglas/steel	677	1136	45	594	1048	10.5
12A4	plexiglas/steel	974	926	45	891	838	11.5
15A4	plexiglas/steel	974	1136	45	891	1048	13